

ACCESSORIES FOR DISHWASHERS




ACCESSORIES FOR DISHWASHERS









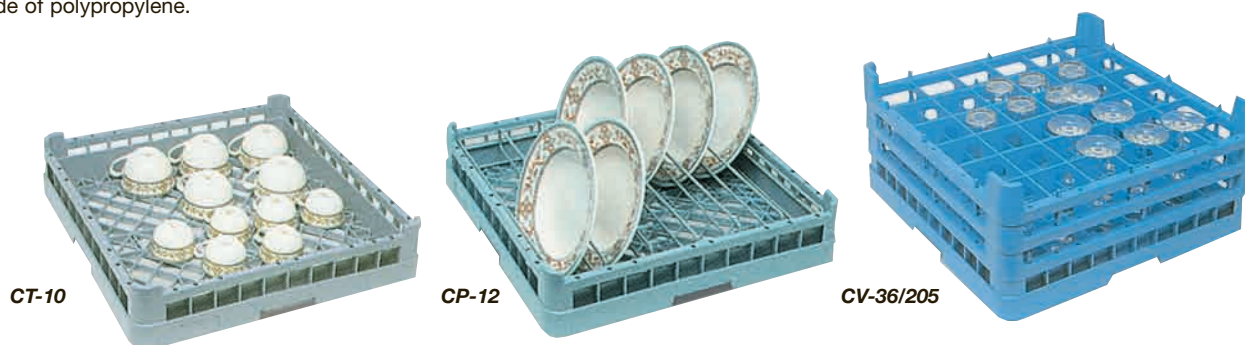






Baskets for dishes	198
Accessories	199
Delivery tables	200
Hot water gas generators	201

BASKETS FOR DISHWASERS


BASKETS FOR DISHWASHERS

Made of polypropylene.



	Model	Reference	Type of basket	Capacity Product	Ø máx mm	H max mm	Colour	Dimensions mm	
	CT-10	2101742100	Single basket	-	-	-	Grey	500x500x110	
	RCT-10	2100429100	Grid base	-	-	-	Grey	500x500	
	CB-7	2101742102	Trays	7	-	-	Yellow	500x500x110	
	CP-16/18	2101742101	Dishes	18 (*) 9 (*)	240 320	50	Orange	500x500x110	
	CP-12	1200105301	Deep dishes	12 (*) 6 (*)	240 320	75	Grey	500x500x140	
	CV-16/105	2101742104	Low Glasses	16	110	100	Blue	500x500x140	
	CV-16/155	2101742107	Medium Glasses	16	110	150	Blue	500x500x190	
	CV-16/205	2101742110	High Glasses	16	110	200	Blue	500x500x240	
	CV-25/105	2101742112	Low Glasses	25	85	100	Blue	500x500x140	
	CV-25/155	2101742115	Medium Glasses	25	85	150	Blue	500x500x190	
	CV-25/205	2101742117	High Glasses	25	85	200	Blue	500x500x240	
	CV-36/105	2101742118	Low Glasses	36	70	100	Blue	500x500x140	
	CV-36/155	2101742120	Medium Glasses	36	70	150	Blue	500x500x190	
	CV-36/205	2101742122	High Glasses	36	70	200	Blue	500x500x240	
	CU-7	2101742123	Cutlery	7÷10 (**)			Yellow	105x105x130	

Remarks: (*) It depends of the position of the dishes in the basket
 (**) To guarantee a correct washing of the cutlery, it is not recommended to introduce more units

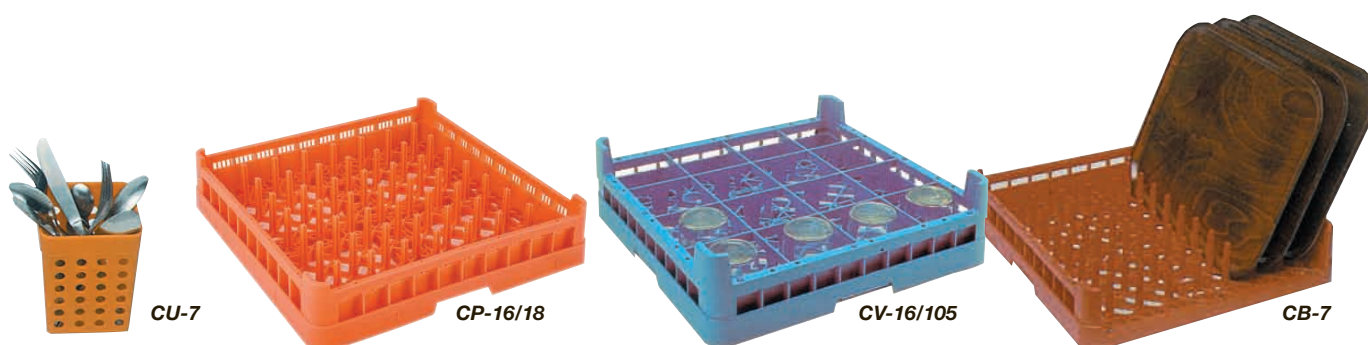

ACCESSORIES FOR DISHWASHERS

ACCESSORIES FOR GLASS-WASHERS



Reference	Description	
Z415320000	SQUARE BASKET - AD-15, LVC-12 and LVC-15 - 350 x 350 x 110 mm	S.P.L.
Z445320000	SQUARE BASKET - AD-21 and LVC-21 - 400 x 400 x 140 mm	S.P.L.
Z605302000	SUPLEMENT FOR SAUCERS - AD-15, LVC-12 and LVC-15	S.P.L.
Z625302000	SUPLEMENT FOR SAUCERS - AD-21 and LVC-21	S.P.L.
Z605303000	CUTLERY CONTAINER - All the models	S.P.L.


SPL : Spare parts list.

ACCESSORIES

Reference	Description	
1200000125	PRESSURE PUMP - 50 Hz - 350x120x160 mm	
1200000132	DETERGENT DOSER	

MANUAL WATER SOFTENERS

For hardness bigger than 5 HF / 3 HD.
Manual maintenance required.



Model	Reference	Capacity of regeneration (*)	Dimensions	
1200000127	KIT 8 LIT. DESCALING UNIT	700 litres between 2 regenerations	Ø 185 x 440 mm	
1200000128	KIT 12 LIT. DESCALING UNIT	1050 litres between 2 regenerations	Ø 185 x 560 mm	
1200000129	KIT 16 LIT. DESCALING UNIT	1400 litres between 2 regenerations	Ø 185 x 740 mm	

WATER SOFTENERS

Water Softeners are used to treat hard water.
They work by replacing the calcium and magnesium in the water with sodium.
They may also remove a small amount of iron or manganese, but for high levels, it is not recommended.
Water Softeners will generally require a professional installation.


All dishwashers requiring water must be connected to a treated water supply when the local water at any time is over 7 HF / 4.0 HD, or has a Cl concentration over 150 mg/litre, or a salt content in excess of 30 mg/litre.

The problems of functioning that come from a defective installation that does not fulfill these conditions will not be born in mind in the guarantee of the product.

DELIVERY / SORTING TABLES

DELIVERY / SORTING TABLES

Serving staff can deposit dirty dishes while the dishwashing staff are sorting them on the other side.
The table is supplied with a sorting shelf (450 mm over the work top) and a waste disposal.
Adjustable feet.



Model	Reference	Shelf dimensions mm	Shelf capacity (baskets)	Dimensions mm	
MD3C	2151502710	1,530x600	3	1,600x800x1,450	
MD4C	2151502711	2,030x600	4	2,100x800x1,450	

GAS HOT WATER GENERATORS

Electronic control of water level and temperature.
 Safety thermostat.
 Double gas valve with safety system and thermocouple.
 Electronic lighting by ignition.
 Safety electrode for flame detector.
 Disconnection system by gas failure. Re-start button.
 Hard water detector.
 Equipped with chimney.
 Electric intake: 230 V - 1+ N.

Built-in:

KIT BAFFLE AND AIR FORCED

Made of stainless steel AISI-304 (18/10).
 Kit of elements to install with the gas boiler
 GA-20 and GA-40.
 Cut-out the gas burner if the exhaust is not correct.

FAN EXTRACTOR

DRAIN PUMP

to eliminate the depositions of the accumulated chlorides.

CHIMNEY



Model	Reference	Production Litres/h	Features (*)	Gas Power		Dimensions mm	
				Kcal/h	KW		
GA-20	1220300100 LPG	180	-	20.000	23,26	550x585x1,900	
	1220300102 Nat						
GA-20 D	1220300120 LPG	180	D	20.000	23,26	550x585x1,900	
	1220300122 Nat						
GA-40	1220300200 LPG	360	-	40.000	46,51	690x585x1,900	
	1220300202 Nat						
GA-40 D	1220300220 LPG	360	D	40.000	46,51	690x585x1,900	
	1220300222 Nat						

(*) Characteristics:

D : These models have one descaling system and switch for start the descaling cycle.
 Pilot light for descaling cycle.
 These machines have a pump to introduce the descaling product in the tank.
 Thermostat adjusted at 60 °C to facilitate the descaling system.
 Built-in drain program.

(*H) : Height with chimney.
 Height without chimney: 670 mm.



AD-120 ECO with built-in GA-20 generator

